




OX[®]

SPECTRUM

TRADE XL TURBO DIAMOND BLADE UNIVERSAL & GP

SPECIFICATION DOCUMENT

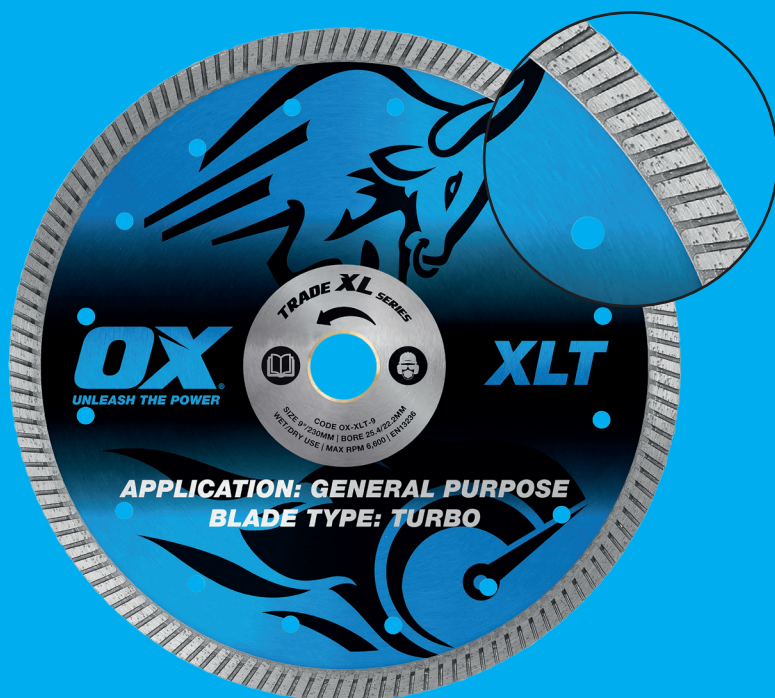

APPLICATION: GENERAL PURPOSE
BLADE TYPE: TURBO

FEATURES

- Semi continuous rim turbo blade for fast cutting of universal and general building products
- 10mm segment height

APPLICATIONS

Precast concrete products, clay products, indian sandstone, engineering bricks, limestone and slate.

MACHINE SUITABILITY



ANGLE
GRINDER



DISC
CUTTER

SAFETY INSTRUCTIONS

BEFORE USE

Ensure blade type and specifications, is suitable for material to be cut. Inspect blade for cracking, segment detachment, undercutting of steel centre just below segment, uneven wear or any defect. Check rotation of machine spindle matches direction arrow on blade. Ensure bore size of blade matches size of machine spindle. Wear adequate safety clothing, including eye protection. Check machine is in safe working order especially protective guards.

DURING USE

Do not apply excessive force when cutting this can damage the blade. Allow regular cooling breaks. If overheating occurs, the product being cut is too hard. A blunt blade can be resharpened by running in a soft abrasive material such as brick or block. If this problem recurs, stop using and consult your supplier. Ensure material being cut is firmly secured, frequently check blade for signs of damage (see before use) if wet cutting, ensure there is plentiful supply of water to both sides of the blade.

STANDARDS

EN13236: European standard that regulates the safety requirements for diamond cutting products.

PACKAGING

Fully recyclable card packaging.



PRODUCT CODE	DESCRIPTION	BARCODE
XLT-115/22	Trade XL Turbo Diamond Blade - Universal & GP - 115/22.23mm	5060530357116
XLT-125/22	Trade XL Turbo Diamond Blade - Universal & GP - 125/22.23mm	5060530357789
XLT-230/22	Trade XL Turbo Diamond Blade - Universal & GP - 230/22.23mm	5060530357123
XLT-300/20	Trade XL Turbo Diamond Blade - Universal & GP - 300/20mm	5060530357130

FOR MORE INFORMATION VISIT
WWW.OXTTOOLS.COM

TOUGH DYNAMIC DIFFERENT

